


High precise Digital Indicator (EMT-DI7000-AV Series)

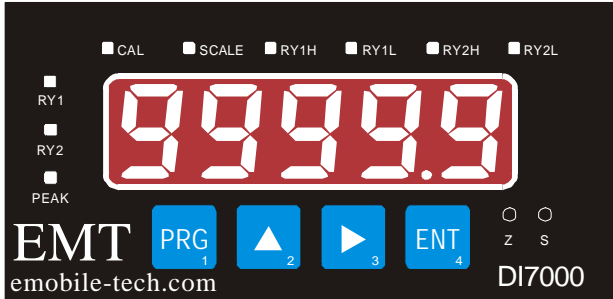

- Active transducer
- : +-10V/ 0 ~ 20mA
-
- : 20 /
-
-
- 5 (-99999 ~ +99999)
- I/O() : 2 Relay (NO/NC)
- : DC ± 10V / 0(4) ~ 20mA

(Technical Specifications)

	DI7000S-AV1	DI7000S-AV0 *
(Display type)	(LED red color)	
(Max. Read out)	- 99999 ~ + 99999	
(Sampling rate)	20 / (max. 20 times / sec.)	
(Height of digits)	14 mm (0.55 inch)	
(Operating temperature range)	0 ~ 60	
(Storage temperature range)	-10 ~ 80	
(Dimensions)		
(Overall size)	96 mm (W) x 48 mm (H) x 144 mm (D)	
(Panel cutout dimensions)	1/8 DIN : 92mm x 45 mm	
(Electrical specifications)		
(Supply voltage)	110 / 220 V AC, 50/60Hz	
(Transducer power supply)	12 V DC / ±15 / 24V	
(Accuracy class)	± 0.01% of reading ± 1 digits	
(Input signal)	± 5 / 10V 0(4) ~ 20mA	
(Output signal)	0~ ±10V DC, 0(4)~20mA	
가 (Additional I/O Module)	2 Relays NO/NC	
(Electrical Control)	Hold, Peak, Reset in front of button key	
(Option)	Serial Interface RS 232 / RS 485	
	가	

. (Technical specification changes reserved)

*

가

DI7000S-AV0/12)

.

DI7000S-AV1/15)