



HOTBOX Data Logger

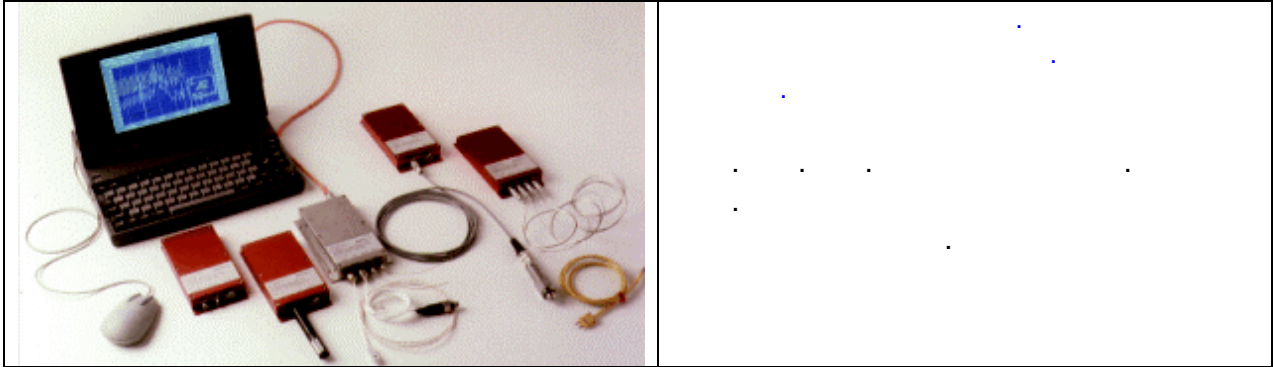

- IP63,
- 1 3 가
- 16'000 D/P, start-/stop and loop memory
- 2 4 . 10 가
- -40 °C +80 °C
- BKT4 = 4 -80 ... +1200 °C
- BA2S = 2 0..4..20 m A
- BV2 = 2 0..0,2..2..20 volt
- 2 가
- **PC** : PC Data cable
- . , PH

HOTBOX SE

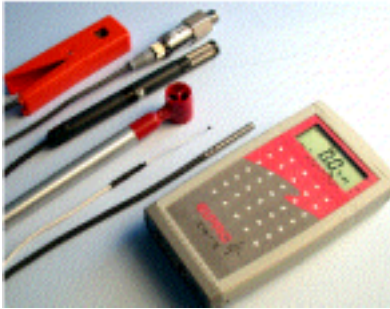

	• 2	가	6	
	• 2	NTC	-50 ... +140'C	
	• 2		4 ... 20 mA	
6	4		±DC Voltage	
		LCD	가	64,000

가

가

- -
 - O2 가 CO2
 -
 -
 - ()
 -
 - Force
 -
- 가

