


Drehmomentsensor Typ RCL-2208 mit Kupplung Typ 966 (Klemmnabenausführung)
torque sensor Typ RCL-2208 with coupling type 966 (clamping hub)

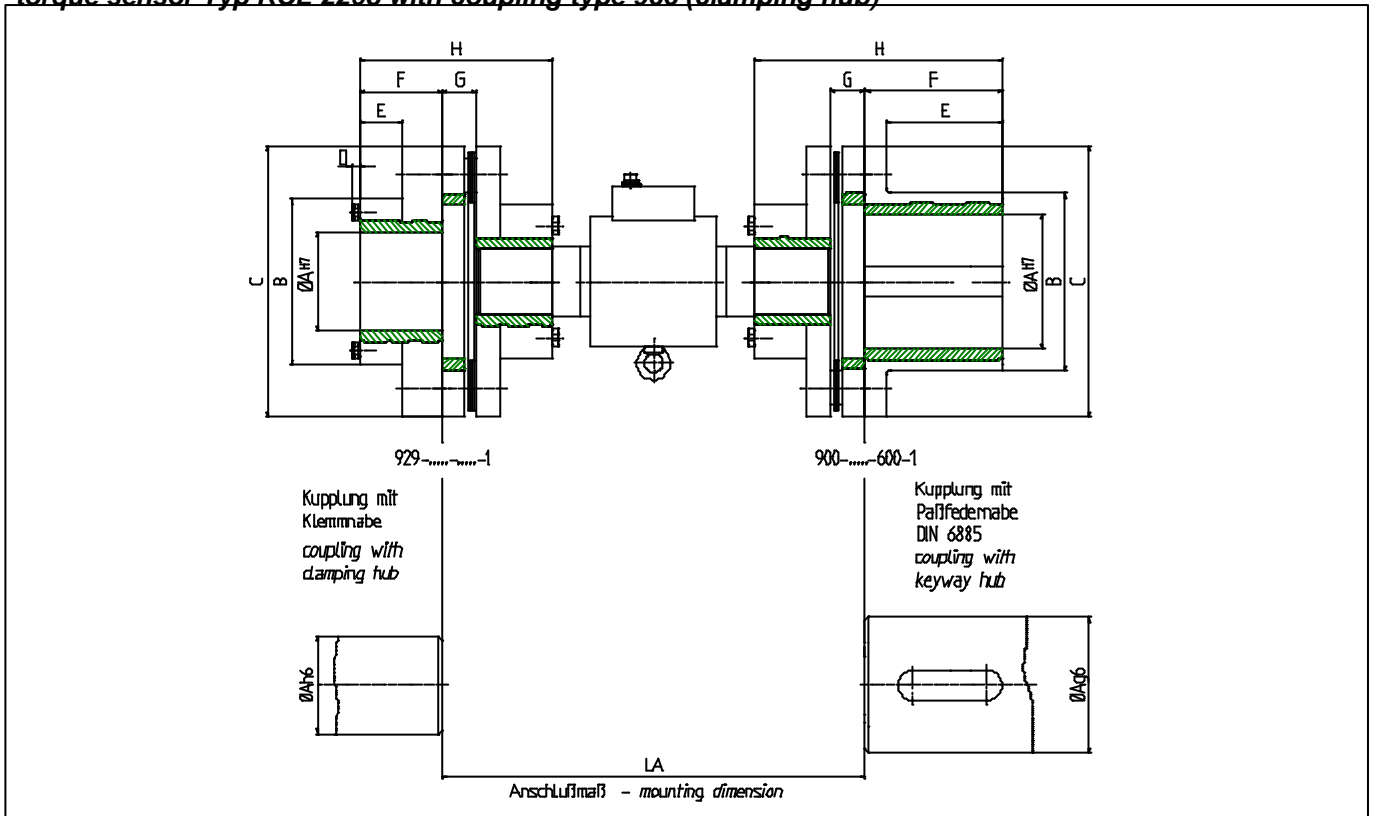

929-....-1 (mit Klemmnabe - with clamping hub)

Artikel Nr:	Meßbereich nominal torque [Nm]	Größe size	max. Drehzahl max. speed [U/min]	Typ 929-....-1	Abmessungen - dimensions [mm]									
					A		B	C	D	E	F	G	H	LA
					min	max								
1287	200/ 2000	250	1300 *(5500)	929-250-75-1	60	75	Ø136	Ø225	7.5	36	65	29.9	169.5	437
1288	200/ 2000	250	1300 *(5500)	929-250-90-1	75	90	Ø155	Ø225	8.0	42	71	29.9	175.5	437
1289	500/ 5000	630	1000 *(5000)	929-630-105-1	90	105	Ø177	Ø290	8.5	46	89	37.5	207	452
1290	500/ 5000	630	1000 *(5000)	929-630-120-1	105	120	Ø204	Ø290	9.5	53	96	37.5	214	452

900-....-600-1 (mit Paßfedernabe - with keyway hub)

Artikel Nr:	Meßbereich nominal torque [Nm]	Größe size	max. Drehzahl max. speed [U/min] *	Typ 900-....-600-1	Abmessungen - dimensions [mm]								
					A		B	C	E	F	G	H	LA
					min	max							
1297	200/ 2000	250	1200 *(5000)	900-250-600-1	70	110	Ø148	Ø225	71.4	89	29.9	193.5	437
1298	500/ 5000	630	1000 *(4500)	900-630-600-1	90	145	Ø190	Ø290	125.5	148.5	37.5	266.5	452

Bei Bestellung bitte immer den gewünschten Ø A angeben. Please specify requested bore A at order.

*max.Drehzahl gewuchtet Q 2.5. Max. speed with balancing Q 2.5.